


FLASH LIGHT

DF2001

COMPONENT	MATERIAL
Lamp body	PC
Lamp head	Rubber
Lamp charger	PC

COMPONENT	MATERIAL
Battery Size	2*2200mAh 18650 Li-Batteries
Lamp head	Cree LED
Mode	High/Low/Flash/Off
Light Output	(H)222lm / (M)69lm / (L)11lm
Beam Distance	(H)240m / (M)270m / (L)110m
Run Time	H:4hrs15min / M:14hrs / L: 82hrs10mins
IP Rating	IP54
Weight	1120.18g
Dimension	256 * 136.2 * 170.4mm

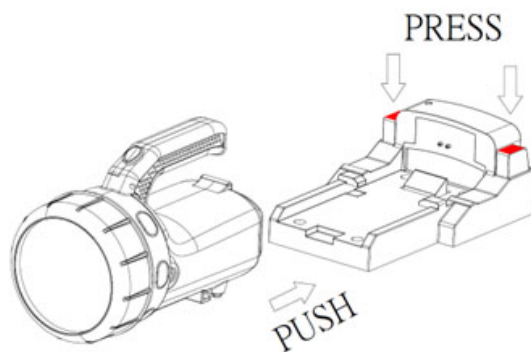

CSA
Ex CLASS I, Zone 0, AEx ia op is II T4
Ga
Class I, Division 1, Groups A, B, C,
D, T4
Class II, Division 1, Groups E, F, and G
Class III, Division 1



UKCA
Ex I M1
II 1G
Ex ia I Ma
Ex ia IIC T4 Ga
Ta=-20°C to + 40°C



ATEX
Ex I M1
II 1G
Ex ia I Ma
Ex ia IIC T4 Ga



IECEx
Ex I M1
II 1G
Ex ia I Ma
Ex ia IIC T4 Ga

www.eyevexsafety.com



Manufactured under licence fr:
EyeveX Safety U.S.A INC.,
1013 Centre Road, Suite 403-B
Wilmington, DE 19805, U.S.A



You can find further information at
www.eyevexsafety.com/products
(or by scanning the QR code).