

An ISO 9001 : 2015 Certified Company

# Tripod

## ETP 9000 (SP) ETP 9000 (DP)

### TRIPOD Ref: ETP-9000 (SP) & ETP-9000 (DP)

EYEVEX Tripod has been designed for confined space entry / retrieval applications. Its simplistic design allows the easy set up providing the user a means of controlled ascent and descent in minimal time

#### FEATURES

- For 7 SP . : Range 1.40 mtr. (4.6 ft.) to 2.13 mtr. (7 ft .)
- For 10 DP . : Range 2.0 mtr. (6.56 ft.) to 3.0 mtr. (10 ft .)
- A pulley system provided for steel cable guiding in case a winch is used in the system.
- Securely connected two eye bolts to be used for connection to personal protective equipment.
- Two pulley system provided to pass the wire rope of winch mounted on the leg and retrieval block on the other leg simultaneously.
- Single pulley system provided to pass the wire rope of winch mounted on the leg and retrieval block on the other leg simultaneously.

#### HOW TO USE

- Refer user instruction

#### LOAD CAPACITY

- Maximum Load Capacity: 500 kgf
- Anchorage Strength: >13KN

#### MATERIAL

Tripod Legs	: Material Aluminium Alloy Finish Anodized
Cast Head	: Material Aluminium Alloy Finish Powder Coated
Eye Bolt & Locking Pins	: Material Stainless Steel Finish Polished

#### WEIGHT

- ETP-9000 (7FT) SP : 13 Kg ± 0.200 kg.
- ETP-9000 (10FT) DP : 15 Kg ± 0.200 kg.

#### RELEVANT STANDARDS

Meets or Exceeds EN 795 2012 Class B  
ANSI Z359.18-2017 Type-A



#### SPECIFICATION 7 ft. (SP)

- Fully adjustable telescopic legs, adjustable height from 1.15m to 2.15m.
- Wheelbase (Footprint) : 1.5m Diameter.
- Weight : 13 kg appx.
- Maximum load capacity : 500 kgf.

Tripod Single Pulley Head  
Ref: ETP-9000 SP



#### SPECIFICATION 7 ft. (DP)

- Fully adjustable telescopic legs, adjustable height from 1.5m to 2.2m.
- Wheelbase (Footprint) : 1.8m Diameter.
- Weight : 15 kg appx.
- Maximum load capacity : 500 kgf.

Tripod Double Pulley Head  
Ref: ETP-9000 DP



CE 2233

MADE IN INDIA



Mfd. Under License from  
EyeveX Safety U.S.A., Inc.  
800 N King Street, Suite 304 1825, Wilmington, DE 19801  
United States of America  
www.eyevexsafety.com




You can find further information at  
[www.eyevexsafety.com/products](http://www.eyevexsafety.com/products)  
(or by scanning the QR code).

An ISO 9001 : 2015 Certified Company

## Winch

## EWN 9001

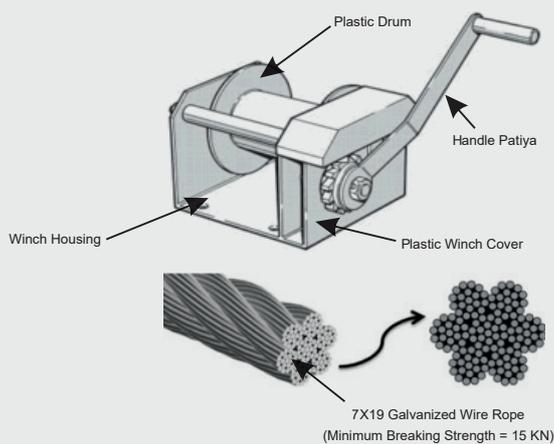

### WINCH

#### Ref: EWN 9001

EYEVEX galvanized wire cable personnel/material related bi-directional winch for confined spaces. Equipped with the Mounting plate and hardware for mounting to EYEVEX Tripod

#### DESIGN

- Material or man lifting rescue winch
- To be used for raising or lowering of personnel or material into confined spaces.
- Galvanized steel wire rope of 4.8 mm
- Equipped with mounting plate having four bolts for mounting with use of special Brackets.
- Handle rotating mechanism for lifting or lowering.

#### BODY

- Material Mild Steel
- Finish: Powder Coated

#### LIFTING LOAD CAPACITY

- 120 kg
- Minimum Breaking Strength: 12KN

#### WEIGHT

- EWN-9001 (20) :- 8.190 ±0.100KG (18.055 lbs)

#### Length

- 20m/65 ft.

#### RELEVANT STANDARDS

- Meets or Exceeds EN 1496:2017 Class A  
ANSI Z359.4-2013



**MADE IN INDIA**

